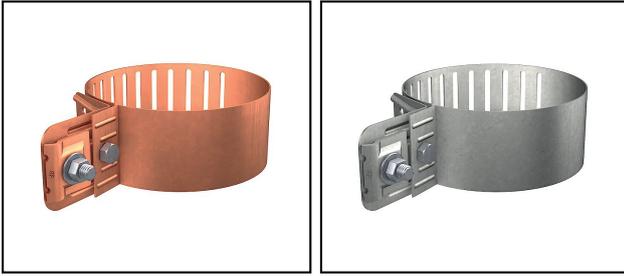


Ableitungen

■ **AL 3** Kontaktbride verstellbar

Artikel-Nr.	E-Nummer									
285.103.000	156 831 160	H	Cu	6 - 10	M8x30	70 - 120				25
280.101.000	156 831 170	H	InoxA2	6 - 10	M8x30	70 - 120				25
280.102.000	156 831 180	H	InoxA2	6 - 10	M8x30	50 - 100				25

Technische Spezifikationen: **Kontaktbride verstellbar AL 3**

	285.103.000	280.101.000	280.102.000
Geprüft Klasse H / N (EN 62561-1)	H		
Material	Cu	InoxA2	
Drahtdurchmesser	6 - 10 mm		
Schraube	M8x30		
Spannbereich rund	70 - 120 mm	50 - 100 mm	
Oberfläche	unbehandelt		
Anzahl der Leiter	1		
Querschnitt des anzuschliessenden Kabels	25 - 75 mm ²		
Klemm-/Spannbereich	70 - 120 mm	50 - 100 mm	
Drehmoment	12 N·m		
Kommerzielle Spezifikation			
Zolltarifnummer	85389000		
Ursprungsland	CH		
Logistische Spezifikation			
VPE Gewicht	7.49 kg	5.76 kg	5.062 kg

