


Accessories

■ **NSL25** Arc catcher




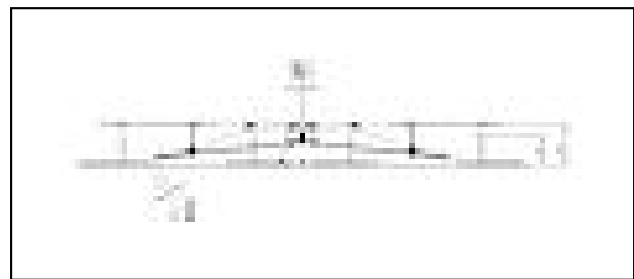

**Application**  
The arc catcher is a mounted device for the Neutral Section / Phase Break NS 25.

**Characteristics**  
The arc catcher is used on Neutral Sections / Phase Breaks in tunnels where a limited system height exists.  
It is compatible with most cantilevers and catenary systems.  
It will be delivered with as a complete arc catcher device with all clamping components and messenger wire insulators.  
Detailed customer related data of the possible site are essential.  
Minimum system height 370 mm  
Maximum system height 620 mm

**Material**  
Stainless steel

**Legend**  
1) Ø cantelever to specify

Article-Nr.									
690.044.000	150 - 350							16	1



Technical Specifications: **Arc catcher NSL25**

	690.044.000
<b>Arcing horn distance</b>	150 - 350 mm
Commercial specification	
<b>Customs number</b>	85354000
<b>country of origin</b>	CH
Logistic specification	
<b>Kilo / piece</b>	16 kg

