


Foundation earthing components

FE 43 Clamp

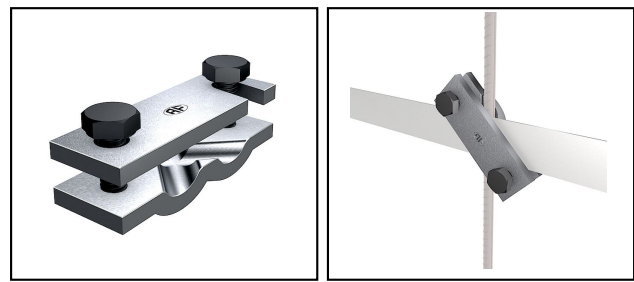

Characteristics
 Cross connector 30x3mm, suitable for parallel connections up to 50x3mm
 Cross connector 50x3mm, suitable for parallel connections up to 80x3mm

Article-Nr.	E-Number									
281.095.000	156 940 110			St	M10x40	6 - 22	30x3			50
281.103.000	156 940 050			St	M10x60	6 - 26	30x3			25
281.109.000	156 940 620			St	M10x80	6 - 28	30x3			25
281.096.000	156 940 140			St	M10x40	6 - 22	50x3			25
281.096.010	156 940 640			St	M10x60	6 - 26	50x3			25
280.000.002	156 940 270	H	ok	InoxA4	M10x40	6 - 22	30x3			50
270.049.000	156 941 270	H	ok	InoxA4	M10x40	6 - 22	50x3			25

Technical Specifications: **Clamp FE 43**

	281.095.000	281.103.000	281.109.000	281.096.000
Approved class H / N (EN 62561-1)				
Suitable for use in soil				
Material	St			
Screw	M10x40	M10x60	M10x80	M10x40
Wire diameter	6 - 22 mm	6 - 26 mm	6 - 28 mm	6 - 22 mm
Band size	30x3 mm			50x3 mm
Type of fastening screws	Hexagon screw			
Type of connector	Access-clip			
Suitable for diameter round conductor	6 - 22 mm	6 - 26 mm	6 - 28 mm	6 - 22 mm
Surface protection	untreated			
required torque	25 N·m			
Commercial specification				
Customs number	85389000			
country of origin	CH			
Logistic specification				
VPE Weight	14.8 kg	7.89 kg	8.4 kg	12 kg

	281.096.010	280.000.002	270.049.000
Approved class H / N (EN 62561-1)		H	
Suitable for use in soil		ok	
Material	St	InoxA4	
Screw	M10x60	M10x40	
Wire diameter	6 - 26 mm	6 - 22 mm	
Band size	50x3 mm	30x3 mm	50x3 mm
Type of fastening screws	Hexagon screw		
Type of connector	Access-clip		
Suitable for diameter round conductor	6 - 26 mm	6 - 22 mm	
Surface protection	untreated		
required torque	25 N·m		
Commercial specification			
Customs number	85389000		
country of origin	CH		
Logistic specification			
VPE Weight	12.42 kg	14.63 kg	12.2 kg

