


Air-termination rods

FL 91 Concrete socket

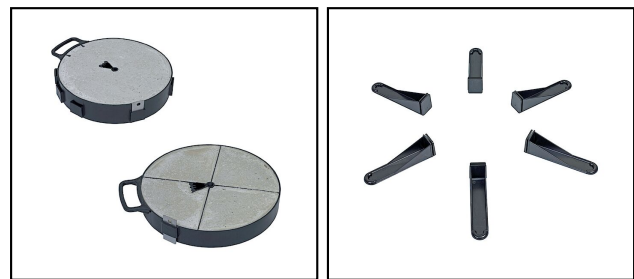

- Legend**
- a) Concrete socket (Ø = 380mm)
 - b) Cantilever (length = 180mm)
 - c) Insulated support (1m) including attachments
 - c) Trough boring

Article-Nr.	E-Number									
276.010.004	156 952 110	Beton	16		10			a)		1
276.010.005	156 952 120	Beton	16		15			a)		1
276.010.020	156 953 910	Beton		M18	10			a)		1
276.010.021	156 953 920	Beton		M18	15			a)		1
276.010.030	156 953 930	Beton	16		10			a)+c)		1
276.010.031	156 953 940	Beton	16		15			a)+c)		1
276.010.033	156 953 950	Beton	21		10			a)+c)		1
276.010.034	156 953 960	Beton	21		15			a)+c)		1
277.010.002	156 953 970	PVC			10	6		b)		1
277.010.003	156 953 980	PVC			10	4		b)		1

Technical Specifications: **Concrete socket FL 91**

	276.010.004	276.010.005	276.010.020	276.010.021
Material	Beton			
Diameter	335 mm	355 mm		
Eyelet diameter	16 mm			
Internal thread			M18	
Socket weight	10 kg	15 kg	10 kg	15 kg
Number of Cantilever				
Surface protection				
Lightning conductor insertion	Gore		Thread	
Model	Base			
Type of accessory				
Commercial specification				
Customs number	85389000			
country of origin	CE			
Logistic specification				
VPE Weight	10 kg	15 kg	10 kg	15 kg

	276.010.030	276.010.031	276.010.033	276.010.034
Material	Beton			
Diameter	355 mm			
Eyelet diameter	16 mm		21 mm	
Internal thread				
Socket weight	10 kg	15 kg	10 kg	15 kg
Number of Cantilever				
Surface protection				
Lightning conductor insertion	Gore			
Model	Base			
Type of accessory				
Commercial specification				
Customs number	85389000			
country of origin	CE			undefined
Logistic specification				
VPE Weight	10 kg	15 kg	10 kg	15 kg

	277.010.002	277.010.003
Material	PVC	
Diameter		
Eyelet diameter		
Internal thread		
Socket weight	10 kg	
Number of Cantilever	6	4
Surface protection	unbehandelt	
Lightning conductor insertion		
Model		
Type of accessory	Montagematerial	
Commercial specification		
Customs number	85389000	
country of origin	CE	
Logistic specification		
VPE Weight	0.4 kg	0.27 kg