


# Foundation earthing components

**FE 64** Connection set Vario

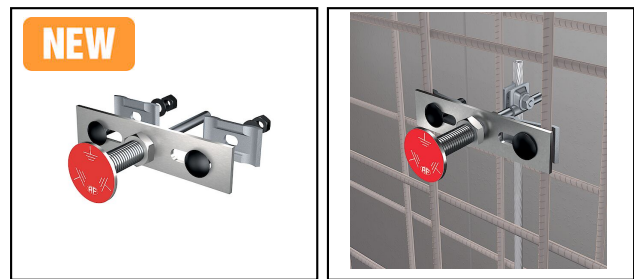

**Application**

- Electrical discharge of the short-circuit possible via 1 reinforcing bar with Ø10mm or separate earthing conductor.
- Pretensioning of 15mm against formwork necessary.






**Characteristics**

- Connection set Vario for variable installation in all installation positions.
- Fastening without nails.
- Stepless adjustment possible via the thread.
- Clean connection after striking due to new adhesive.

Pretensioning of 15mm against formwork necessary.  
Electrical discharge of the short-circuit possible via 1 reinforcing bar with Ø10mm or separate earthing conductor.

**Content**

- 1 Connection part
- 1 Mounting bracket
- 2 connection plates
- 1 Connection part (type FE 27)
- 1 Around cross clamp (type FE 45)
- 3 Clout nails made of stainless steel

Article-Nr.	E-Number									
261.051.000	156 940 730	6	InoxA4	M10x25	6 - 22					1



Technical Specifications: **Connection set Vario FE 64**

	261.051.000
<b>Short circuit current</b>	6 kA/1s
<b>Material</b>	InoxA4
<b>Screw</b>	M10x25
<b>Clamping range round</b>	6 - 22 mm
<b>Diameter connection plate</b>	50 mm
<b>Connecting shaft</b>	10 mm
<b>Material connection lug</b>	rostfreier Stahl (V4A)
<b>Length</b>	180 mm
<b>Bolt dimension metric</b>	10
Commercial specification	
<b>Customs number</b>	85389030
<b>country of origin</b>	CH
Logistic specification	
<b>VPE Weight</b>	6.81 kg

