


Splice fittings

■ SKR169 Adjustable contact wire splice fitting

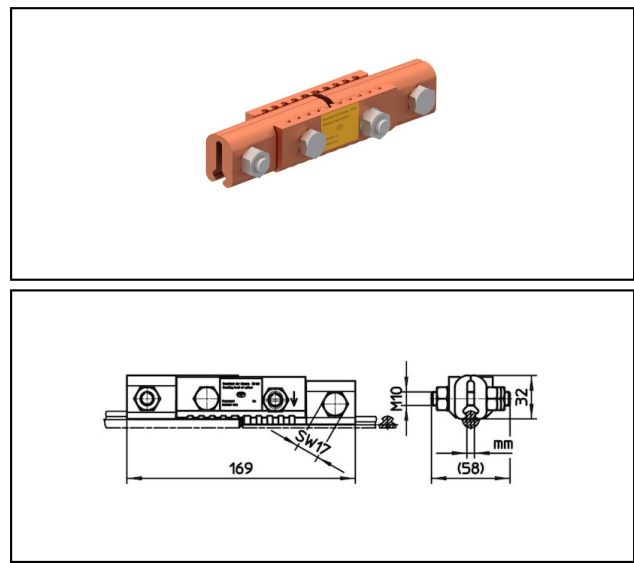

**Application**  
Contact wire splice fitting adjustable for copper or copper alloy contact wire

**Characteristics**  
Torque 50 Nm

**Material**  
Clamping plates CuNiSi

| Article-Nr. |  |  |  |  |  |  |  |  |  |
|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|--|--|--|-------------------------------------------------------------------------------------|
| 635.024.000 | - 150                                                                             | - 107                                                                             | - 120                                                                             | 5.6 - 6.9                                                                         |  |  |  |  | 1.07                                                                                |

Technical Specifications: **Adjustable contact wire splice fitting SKR169**

|                               |              |
|-------------------------------|--------------|
| Article No.                   | 635.024.000  |
| Starting torque               | 50 N·m       |
| Contact wire section Cu       | - 150 mm²    |
| Contact wire section CuMg 0.2 | - 107 mm²    |
| Contact wire section CuAg     | - 120 mm²    |
| Contact wire groove           | 5.6 - 6.9 mm |
| Commercial specification      |              |
| Customs number                | 85359000     |
| country of origin             | CH           |
| Logistic specification        |              |
| Kilo / piece                  | 1.07 kg      |

