


Conductor connections and junctions

■ AV 14 Crimping wire lug, 3-hole

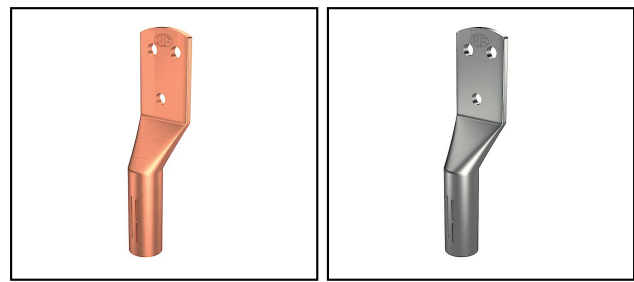

Characteristics
For hexagonal pressing

Article-Nr.	E-Number									
414.060.062	156 341 570	Cu	10	6	25	3x4.1				25
414.060.112	156 341 580	Cu	12	8	35	3x4.1				25
414.060.063	156 340 570	CuSn	10	6	25	3x4.1				25
414.060.113	156 340 580	CuSn	12	8	35	3x4.1				25

Technical Specifications: **Crimping wire lug, 3-hole AV 14**

	414.060.062	414.060.112	414.060.063	414.060.113
Material	Cu		CuvSn	
KZ size of insert for crimp tool	10	12	10	12
Wire diameter	6 mm	8 mm	6 mm	8 mm
Nominal cross section conductor	25 mm²	35 mm²	25 mm²	35 mm²
Eyelet diameter	3x4.1 mm			
Connecting angle	Straight			
Surface protection	blank		Tinned	
Bolt dimension metric	6	8	6	8
Number of mounting holes	3			
Commercial specification				
Customs number	85389000			
country of origin	CE			
Logistic specification				
VPE Weight	0.43 kg	0.8 kg	0.441 kg	0.723 kg

