


Cable dropper clamps

■ SKTF4 Dropper clamp for contact wire and catenary cable

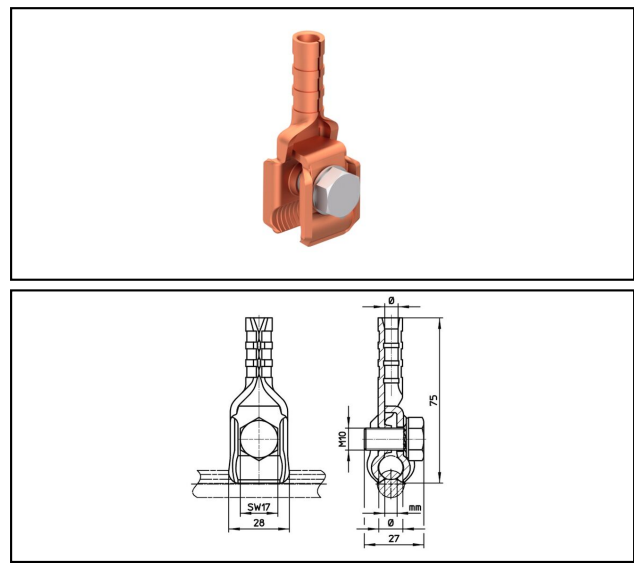

**Application**  
For droppers, current feeding

**Characteristics**  
KZ = Key number of hexagonal pressing tool  
Torque 20-25 Nm

**Material**  
Corpus CuNiSi

- Legend**
- 1) With sleeve of distance
  - 2) KZ 11
  - 3) KZ 13
  - 4) Torque 20 - 40 Nm
  - 5) KZ 12

| Article-Nr. |  |  |  |  |  |  |  |  |
|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 625.030.000 | 6.5 - 12.6                                                                        | 25 - 95                                                                           | 3 - 8.5                                                                           | 4.5                                                                               | 10                                                                                |  | 0.1                                                                                 | 2                                                                                   |

Technical Specifications: Dropper clamp for contact wire and catenary cable SKTF4

|                          |               |
|--------------------------|---------------|
| Article No.              | 625.030.000   |
| Catenary wire diameter   | 6.5 - 12.6 mm |
| Catenary wire section    | 25 - 95 mm²   |
| Contact wire groove      | 3 - 8.5 mm    |
| Dropper wire diameter    | 4.5 mm        |
| Dropper wire section     | 10 mm²        |
|                          | 20 - 25 N·m   |
|                          |               |
| comment                  | 2             |
| Commercial specification |               |
| Customs number           | 85359000      |
| country of origin        | CH            |
| Texte                    |               |
| comment                  | 2             |
| Logistic specification   |               |
| Kilo / piece             | 0.1 kg        |

