


Cable dropper clamps

SKTF4

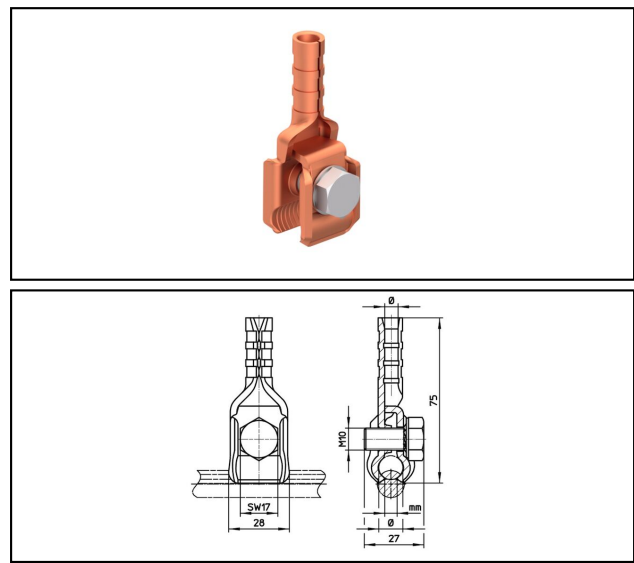

Application
For droppers, current feeding

Characteristics
KZ = Key number of hexagonal pressing tool
Torque 20-25 Nm

Material
Corpus CuNiSi

- Legend**
- 1) With sleeve of distance
 - 2) KZ 11
 - 3) KZ 13
 - 4) Torque 20 - 40 Nm
 - 5) KZ 12

Article-Nr.									
625.024.000	6.5 - 12.6	25 - 95	3 - 8.5	7.5	25			0.11	3
625.030.000	6.5 - 12.6	25 - 95	3 - 8.5	4.5	10			0.1	2
625.509.000	10.5 - 12.6	65 - 95	6 - 7	6	16			0.115	1, 4, 5
625.021.000	6.5 - 12.6	25 - 95	3 - 8.5	6	16			0.11	5
625.032.000	12.6 - 14	95 - 120	5.6 - 8.5	4.5	10			0.12	2
625.033.000	12.6 - 14	95 - 120	5.6 - 8.5	6	16			0.12	5

Technical Specifications: SKTF4

	625.024.000	625.030.000	625.509.000	625.021.000
Catenary wire diameter	6.5 - 12.6 mm		10.5 - 12.6 mm	6.5 - 12.6 mm
Catenary wire section	25 - 95 mm²		65 - 95 mm²	25 - 95 mm²
Contact wire groove	3 - 8.5 mm		6 - 7 mm	3 - 8.5 mm
Dropper wire diameter	7.5 mm	4.5 mm	6 mm	
Dropper wire section	25 mm²	10 mm²	16 mm²	
	20 - 25 N·m			
Commercial specification				
Customs number	85359000			
country of origin	CH			
Logistic specification				
Kilo / piece	0.11 kg	0.1 kg	0.115 kg	0.11 kg

	625.032.000	625.033.000
Catenary wire diameter	12.6 - 14 mm	
Catenary wire section	95 - 120 mm²	
Contact wire groove	5.6 - 8.5 mm	
Dropper wire diameter	4.5 mm	6 mm
Dropper wire section	10 mm²	16 mm²
	20 - 25 N·m	
Commercial specification		
Customs number	85359000	
country of origin	CH	
Logistic specification		
Kilo / piece	0.12 kg	

