


## Earthing bars

### ■ ES4547 Earthing bar (two-part)

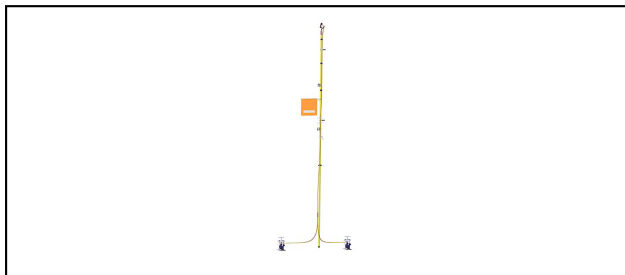

#### Application

Earthing for overhead contact lines


#### Characteristics

1 earthing device consisting of:

- 1 Earthing rod, 2 pieces, L = 4575 mm
- 1 take-up unit
- 1 Y-cable 50 mm<sup>2</sup>, L = 4000 mm, transparent, isolated
- 1 contact wire hook resistant against throwing off, earthing connection screw M12
- 2 earthing clamps adjustable to all railheads
- 1 signal flag

#### Material




Rod of polyester reinforced glass fibre, contact wire hook with CuNiSi

Article-Nr.	 kA I <sub>ms</sub> I <sub>k</sub>								
645.150.000	40/120								

#### Accessories






Signalflag without fixing 649.002.000

Article-Nr.	 mm							 Kg	
649.002.000	44								3

#### Accessories



Signal flag 640.055.000

Article-Nr.	 mm							 Kg	
640.055.000	44								2

Technical Specifications: **Earthing bar (two-part) ES4547**

	645.150.000
<b>Short circuit current</b>	40/120 kA/ms
Commercial specification	
<b>Customs number</b>	85359000
<b>country of origin</b>	undefined

