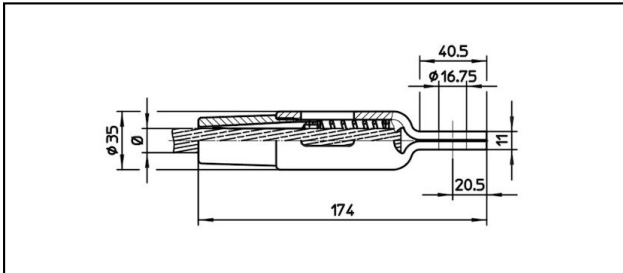
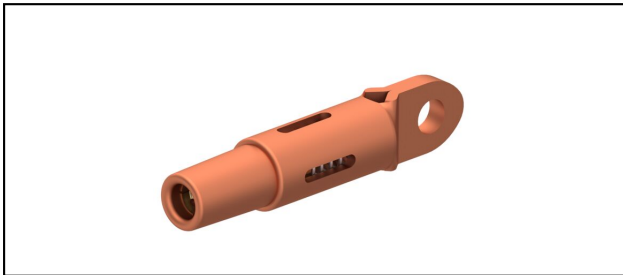


## Eyelet collar sockets CuNiSi

## ■ OCK174

**Application**

Cu, Cu-steel or Bz tensioned cables

**Characteristics**

Service load min. 3 kN / max. 25 kN

Breaking load of corpus min. 80 kN

**Material**

Corpus CuNiSi / Collet AIBz

| Article-Nr. |  |  |  |  |  |  |  |  |  |
|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|--|--|-------------------------------------------------------------------------------------|
| 615.196.105 | FD120                                                                             |                                                                                   |                                                                                   | 12.9                                                                              | 120                                                                               |  |  |  | 0.62                                                                                |
| 615.160.105 | S120                                                                              | 14                                                                                | 120                                                                               |                                                                                   |                                                                                   |  |  |  | 0.64                                                                                |
| 615.159.106 | FD150                                                                             |                                                                                   |                                                                                   | 14.5                                                                              | 150                                                                               |  |  |  | 0.63                                                                                |
| 615.167.158 | FD161                                                                             |                                                                                   |                                                                                   | 14.5                                                                              | 161                                                                               |  |  |  | 0.63                                                                                |
| 615.161.106 | S150                                                                              | 15.8                                                                              | 150                                                                               |                                                                                   |                                                                                   |  |  |  | 0.62                                                                                |

Technical Specifications: **OCK174**

|                          |             |             |             |             |
|--------------------------|-------------|-------------|-------------|-------------|
|                          | 615.196.105 | 615.160.105 | 615.159.106 | 615.167.158 |
| Rail product name        | FD120       | S120        | FD150       | FD161       |
| Catenary wire diameter   |             | 14 mm       |             |             |
| Catenary wire section    |             | 120 mm²     |             |             |
| Contact wire diameter    | 12.9 mm     |             | 14.5 mm     |             |
| Contact wire section     | 120 mm²     |             | 150 mm²     | 161 mm²     |
| Commercial specification |             |             |             |             |
| Customs number           | 85359000    |             |             | 0           |
| country of origin        | CH          |             |             | undefined   |
| Logistic specification   |             |             |             |             |
| Kilo / piece             | 0.62 kg     | 0.64 kg     | 0.63 kg     |             |

|                               | 615.161.106         |
|-------------------------------|---------------------|
| <b>Rail product name</b>      | S150                |
| <b>Catenary wire diameter</b> | 15.8 mm             |
| <b>Catenary wire section</b>  | 150 mm <sup>2</sup> |
| <b>Contact wire diameter</b>  |                     |
| <b>Contact wire section</b>   |                     |
| Commercial specification      |                     |
| <b>Customs number</b>         | 85359000            |
| <b>country of origin</b>      | CH                  |
| Logistic specification        |                     |
| <b>Kilo / piece</b>           | 0.62 kg             |

