
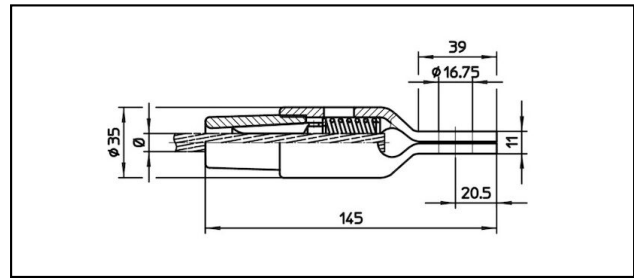


Eyelet collar sockets CuNiSi

■ **OCK145** Eyelet collar socket

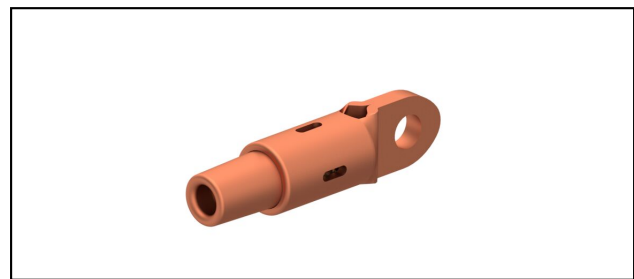

**Application**  
Cu, Cu-steel or Bz tensioned cables

**Characteristics**  
Service load min. 3 kN / max. 25 kN  
Breaking load of corpus min. 80 kN

**Material**  
Corpus CuNiSi / Collet AIBz

| Article-Nr. |  |  |  |  |  |  |  |  |  |
|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|--|--|-------------------------------------------------------------------------------------|
| 615.154.150 | FD85                                                                              |                                                                                   |                                                                                   | 10.8                                                                              | 85                                                                                |  |  |  | 0.53                                                                                |

Technical Specifications: **Eyelet collar socket OCK145**

|                              |                    |
|------------------------------|--------------------|
| Article No.                  | 615.154.150        |
| <b>Rail product name</b>     | FD85               |
| <b>Contact wire diameter</b> | 10.8 mm            |
| <b>Contact wire section</b>  | 85 mm <sup>2</sup> |
| Commercial specification     |                    |
| <b>Customs number</b>        | 85359000           |
| <b>country of origin</b>     | CH                 |
| Logistic specification       |                    |
| <b>Kilo / piece</b>          | 0.53 kg            |

