


Interception components

■ **FL 82b** Flat roof lead through Part of

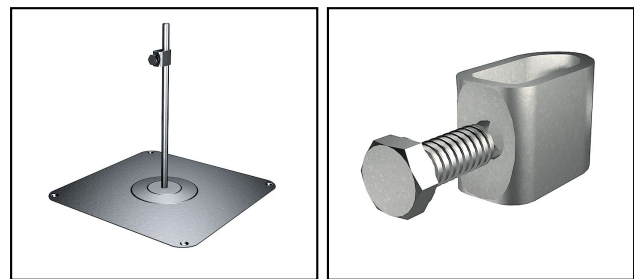

Characteristics
For blankets of bituminous, mastic concrete or synthetic material

- Legend**
a) Tablet (320x320mm) with rod welded incl. access-clip
b) Wire Cu d. 8mm / 650mm / 2 clamps FE 41
c) connection clamp

Article-Nr.	E-Number									
220.023.003	156 941 450	H	InoxA2	300	6 - 12	12			a)	2
220.023.004	156 941 470	H	InoxA2	500	6 - 12	12			a)	2
220.023.002	156 941 460		Cu			8			b)	1
250.015.000	156 941 500	H	InoxA2		6 - 12				c)	1

Technical Specifications: Flat roof lead through Part of FL 82b

	220.023.003	220.023.004	220.023.002	250.015.000
Approved class H / N (EN 62561-1)	H			H
Material	InoxA2		Cu	InoxA2
Height H	300 mm	500 mm		
Wire diameter	6 - 12 mm			
Diameter D	12 mm		8 mm	
Surface protection	unbehandelt		sonstige	untreated
Type of accessory	Dach-, Wand- und Erderdurchführung			
Commercial specification				
Customs number	85389000			
country of origin	CH			
Logistic specification				
VPE Weight	3.73 kg		0.662 kg	

