


Forked collar sockets

■ **GI40/40,21.5** Forked collar socket

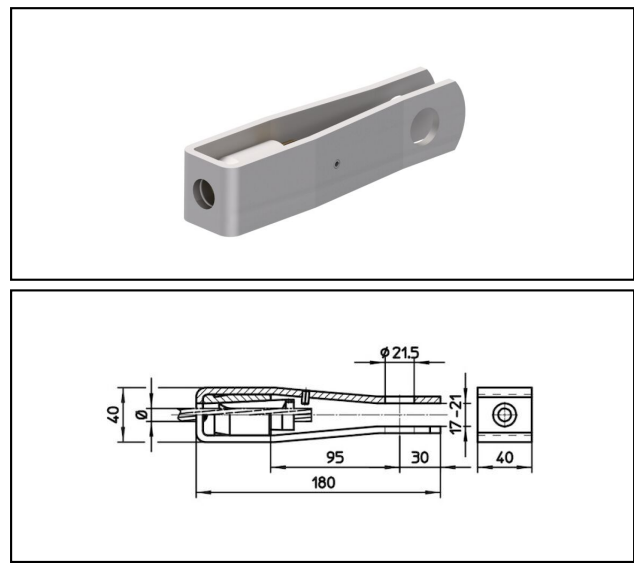

**Application**  
Cu, Cu-steel, steel or Bz tensioned cables

**Characteristics**  
Service load min. 3 kN / max. 25 kN  
Breaking load of corpus min. 60 kN

**Material**  
Corpus stainless steel / Collet AlBz resp. stainless steel

**Legend**  
1) Collet of stainless steel for steel cables  
2) With colour code

| Article-Nr. |  |  |  |  |  |  |  |  |  |
|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|--|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 610.005.103 | S70                                                                               | 11.3                                                                              | 70                                                                                |                                                                                   |                                                                                   |  |  | 0.75                                                                                |                                                                                     |



Technical Specifications: **Forked collar socket** **GI40/40,21.5**

|                               |                    |
|-------------------------------|--------------------|
| Article No.                   | 610.005.103        |
| <b>Rail product name</b>      | S70                |
| <b>Catenary wire diameter</b> | 11.3 mm            |
| <b>Catenary wire section</b>  | 70 mm <sup>2</sup> |
| Commercial specification      |                    |
| <b>Customs number</b>         | 85359000           |
| <b>country of origin</b>      | CH                 |
| Logistic specification        |                    |
| <b>Kilo / piece</b>           | 0.75 kg            |

