


Up to 25 kV

■ **NSRE25** Half a neutral section/phase break

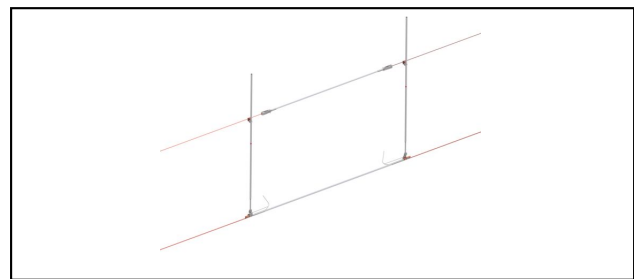

Application
Half phase break/neutral section to separate different electrical phases or systems
For regional trains and heavy rail
Maximum speed up to 250 km/h (from 120 km/h with lever)

Characteristics
Insulator rods revolvable in case of wear

Material
GRP/PTFE, Cu, CuNiSi, stainless steel

Legend
1) Please contact us for any further information

Article-Nr.	 mm ²	 kN	 mm	 mm	 mm	 mm			
655.999.008	107 - 150	8 - 24	2490	3045	2230	3230			1



Technical Specifications: **Half a neutral section/phase break NSRE25**

Article No.	655.999.008
Contact wire section	107 - 150 mm ²
Recommended service load	8 - 24 kN
Creeping distance	2490 mm
Length between suspension	3045 mm
Arcing horn distance	2230 mm
Total length	3230 mm
comment	1
Commercial specification	
country of origin	undefined
Texte	
comment	1

