


Section insulators

FTM1.5 Section insulator

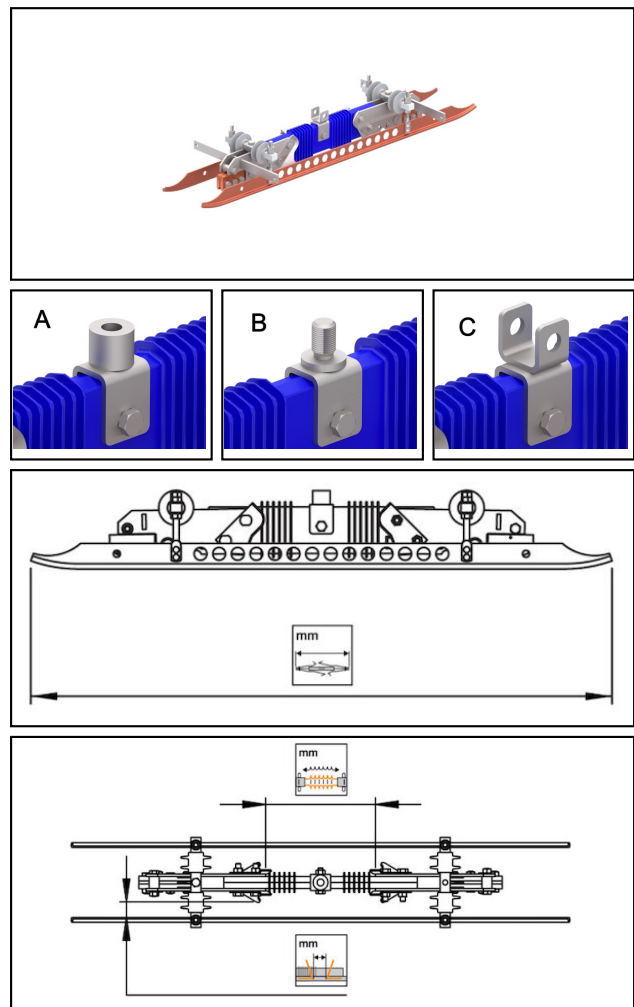

Application
Neutral section or section insulator for tramway and light rail
Maximum speed up to 80 km/h
With central suspension on insulator

Material
GRP/silicone, Cu, CuNiSi, stainless steel

- Legend**
- 1) Center suspension only
 - 2) Center and standard suspension
 - A) With threaded sleeve 5/8
 - B) With threaded bolt M16
 - C) With bracket for Ø 12" bolt 1

Article-Nr.									
655.300.036	80 - 150	5.6 - 6.9	370	610	435	35	1000	max.10	B, 2

Accessories									
 Turnbuckle SSCH110-135									
Article-Nr.									
695.002.671	110 - 135								0.192

Accessories									
 Turnbuckle SSCH95-125									
Article-Nr.									
695.001.670	95 - 125								0.139



Accessories



Turnbuckle SSCH200-280

Article-Nr.									
690.010.727	200 - 280	15						0.163	1, 3
690.023.727	200 - 280	15						0.163	1, 2
690.025.727	200 - 280	18	8					0.163	1, 2
690.035.000	200 - 280	18	8					0.163	1, 3
690.038.000	200 - 280	18	8					0.163	1, 3, 4

Accessories



SAL

Article-Nr.								
696.016.010	Al	1610						1.2

Technical Specifications: **Section insulator FTM1.5**

Article No.	655.300.036
Contact wire section	80 - 150 mm²
Contact wire groove	5.6 - 6.9 mm
Creeping distance	370 mm
Length between suspension	610 mm
Length between contact wire	435 mm
Arcing horn distance	35 mm
Total length	1000 mm
Recommended service load	max.10
Specified mechanical load (SML)	80 kN
Minimum breaking load of the section insulator	80 kN
comment	B, 2
Commercial specification	
Customs number	85353000
country of origin	CH
Texte	
comment	B, 2
Logistic specification	
Kilo / piece	11 kg

