


Down-conductor components

AL 60 Lightning protection measurements

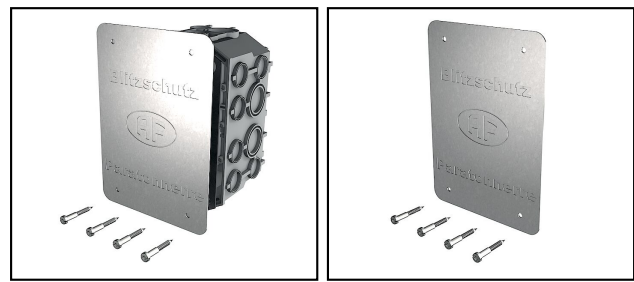

Characteristics
For isolated facing
Eruption site for protective sleeve Ø 20mm
Splashproof cover with neoprene gasket. Fastener with four cross recessed screws

Legend
a) Set complete incl. box, cover and 4 screws
b) Cover and 4 screws

Article-Nr.	E-Number									
276.030.000	155 170 305	InoxA2	115	95	170				a)	1
270.002.001	155 970 305	InoxA2	130		185				b)	1

Technical Specifications: **Lightning protection measurements AL 60**

	276.030.000	270.002.001
Material	InoxA2	
Length a	115 mm	130 mm
Width b	95 mm	
Height c	170 mm	185 mm
Length	170 mm	185 mm
Width	115 mm	130 mm
Model	Other	Signalling cover
Housing feed-through by break-out opening	Yes	
Sealable	No	
Equipped with	None	
For tubediameter	20/25 mm	
Colour	Grey	Other
Surface protection	unbehandelt	
Type of fastening		Cover for screw mounting
With screening	No	
For box-/housing width		115 mm
Depth	95 mm	
With screws		Yes
Mounting method	Flush mounted (plaster)	
Shape	Rectangular	Square
Cover plate	Not transparent	
Construction type	Device connection box (round/square)	
For box-/housing length		170 mm
Wind proof	No	
Halogen free	Yes	
Cover attachment	Bolted	
Number of inlets	2	
Commercial specification		
Customs number	73262000	
country of origin	CH	
Logistic specification		
VPE Weight	0.578 kg	0.23 kg

