


Earthing strip clamps

■ AV 28 Strip to clamping head

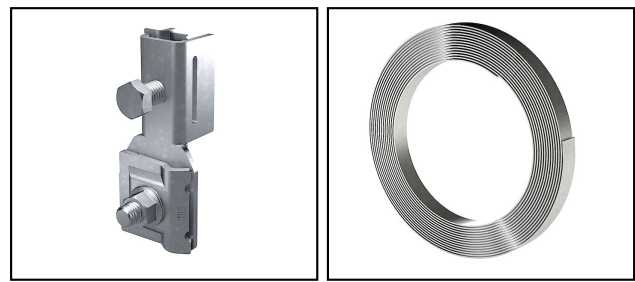

**Characteristics**  
With connection terminal for longitudinal and transversal wiring.  
Not to be used in the ground.  
For conductor cross sections min. 1x 2.5mm<sup>2</sup> max. 2x 25mm<sup>2</sup>  
resp. 1x Ø 8mm.

**Legend**  
a) single clamping head to type AV 26  
b) strip to type AV 26 and PA 88  
a) Single clamping head to type PA88  
b) strip to type PA 88 and AV 26

| Article-Nr. | E-Number    |  |  |  |  |  |  |  |  |  |
|-------------|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|--|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 280.105.007 | 156 942 040 |                                                                                   | InoxA2                                                                            |                                                                                   | 23x0.3                                                                            |  |  | b)                                                                                  | 50                                                                                  | 50                                                                                  |



Technical Specifications: **Strip to clamping head AV 28**

|                          |             |
|--------------------------|-------------|
| Article No.              | 280.105.007 |
| Material                 | InoxA2      |
| Band size                | 23x0.3      |
| Clamping/chucking range  | 18 - 600 mm |
| Surface protection       | unbehandelt |
|                          |             |
| comment                  | b)          |
| Commercial specification |             |
| Customs number           | 85389000    |
| country of origin        | CE          |
| Texte                    |             |
| comment                  | b)          |
| Logistic specification   |             |
| VPE Weight               | 2.86 kg     |