


Thread bolt

FRL 8 Thread bolt

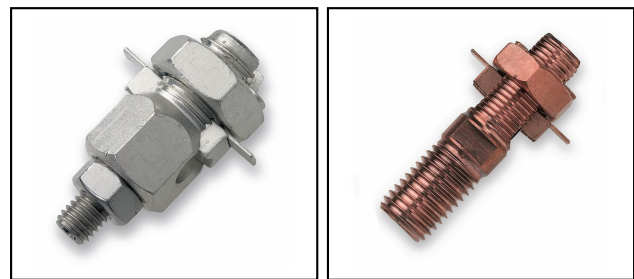

Characteristics
Special executions are available on request

- Legend**
- a) Thread bolt M8 and nut, tinned
 - b) Thread bolt M10, nut and washer, bare
 - c) Thread bolt M12, nut and washer, bare
 - d) Clamp with thread M16, bare

Article-Nr.	E-Number									
123.177.605	156 200 580	Cu	35	8					b)	25
123.181.000	156 201 580	Cu	35	8					c)	25
123.176.604	156 200 570	CuVSn	25	6					a)	50
125.192.109	156 201 570	CuNiSi	25	6					d)	50

Technical Specifications: **Thread bolt FRL 8**

	123.177.605	123.181.000	123.176.604	125.192.109
Material	Cu		CuVSn	CuNiSi
Nominal cross section conductor	35 mm²		25 mm²	
Wire diameter	8 mm		6 mm	
Nominal cross section main conductor, SE	35 mm²		25 mm²	
Surface protection	blank		Tinned	blank
Terminal insulated	No			
Type of connection	Screw connector			
Clamping channel opening main conductor	beidseitig offen			einseitig offen
Material main conductor	Kupfer			
Material branch conductor	Kupfer			
Nominal cross section branch conductor, SM/RM	16 - 35 mm²		10 - 25 mm²	
Clamping channel opening branch conductor	beidseitig offen			einseitig offen
Nominal cross section main conductor, SM	35 mm²		25 mm²	
Nominal cross section branch conductor, SE/RE	16 - 35 mm²		10 - 25 mm²	
required torque	35 N·m		25 N·m	
Commercial specification				
Customs number	85389000			
country of origin	CH			
Logistic specification				
VPE Weight	3.49 kg		3.8 kg	