


Organes de descente

■ **AL 3** Collier de contact réglable

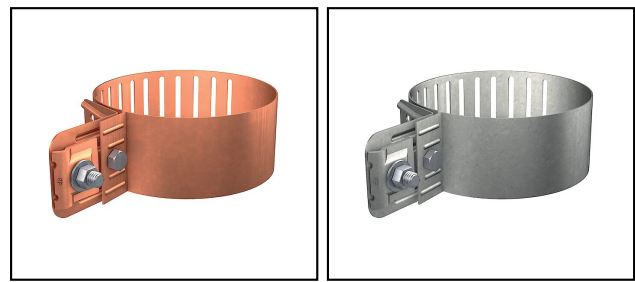

| Réf. article | Nombre-E    |  |  |  |  |  |  |  |  |  |
|--------------|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|--|--|-------------------------------------------------------------------------------------|
| 285.103.000  | 156 831 160 | H                                                                                 | Cu                                                                                | 6 - 10                                                                            | M8x30                                                                             | 70 - 120                                                                          |  |  |  | 25                                                                                  |
| 280.101.000  | 156 831 170 | H                                                                                 | InoxA2                                                                            | 6 - 10                                                                            | M8x30                                                                             | 70 - 120                                                                          |  |  |  | 25                                                                                  |
| 280.102.000  | 156 831 180 | H                                                                                 | InoxA2                                                                            | 6 - 10                                                                            | M8x30                                                                             | 50 - 100                                                                          |  |  |  | 25                                                                                  |

Caractéristiques techniques: **Collier de contact réglable AL 3**

|                                             |             |             |             |
|---------------------------------------------|-------------|-------------|-------------|
|                                             | 285.103.000 | 280.101.000 | 280.102.000 |
| Approuvé classe H / N (EN 62561-1)          | H           |             |             |
| Matériel                                    | Cu          | InoxA2      |             |
| Diamètre de fil                             | 6 - 10 mm   |             |             |
| Vis                                         | M8x30       |             |             |
| Réglage de la pince matériel ronde          | 70 - 120 mm |             | 50 - 100 mm |
| Surface                                     | non-traité  |             |             |
| Nombre de conducteurs                       | 1           |             |             |
| Section transversale des câbles à connecter | 25 - 75 mm² |             |             |
| Zone de serrage/de callage                  | 70 - 120 mm |             | 50 - 100 mm |
| couple de serrage                           | 12 N·m      |             |             |
| Spécifications commerciales                 |             |             |             |
| Numéro de tarif douanier                    | 85389000    |             |             |
| pays d'origine                              | CH          |             |             |
| Spécifications logistiques                  |             |             |             |
| VPE Poids                                   | 7.49 kg     | 5.76 kg     | 5.062 kg    |