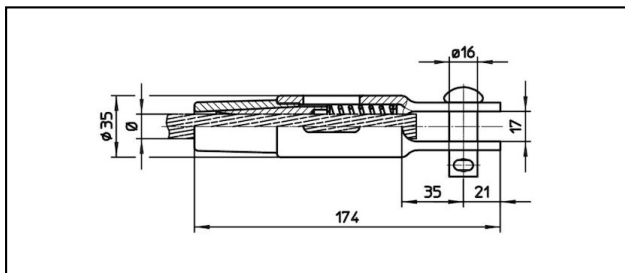
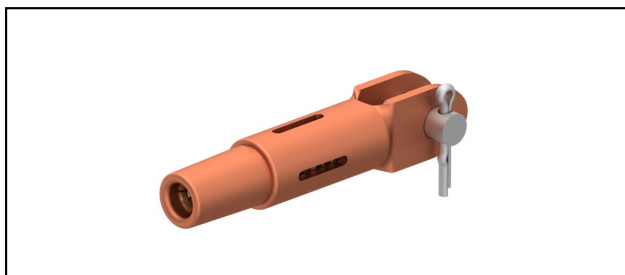


Morse di amarro

■ GCK174/17

**Applicazione**

Conduttori in Cu, Cu-acciaio o Bz sottoposti a tiro meccanico

Caratteristiche

Carico di esercizio min. 3 kN / max. 25 kN

Carico di rottura del corpo min. 80 kN

Materiale

Corpo CuNiSi / Cono AIBz o CuNiSi

Rif. Articolo									
615.039.106	S120/FD150	14.5	120	14.5	150				0.73
615.040.105	S120	14	120						0.73
615.041.106	S150	15.8	150						0.72
615.054.105	FD120			13.2	120				0.73

Specifiche tecnici: **GCK174/17**

	615.039.106	615.040.105	615.041.106	615.054.105
ferroviaria prodotto nome	S120/FD150	S120	S150	FD120
Diametro funi portanti	14.5 mm	14 mm	15.8 mm	
Sezione funi portanti	120 mm²		150 mm²	
Diametro filo di contatto	14.5 mm			13.2 mm
Sezione filo di contatto	150 mm²			120 mm²
Specifiche commerciali				
Numero di tariffa doganale	85359000			
paese di origine	CH			
Specificazione logistica				
Chilo / pezzo	0.73 kg		0.72 kg	0.73 kg

