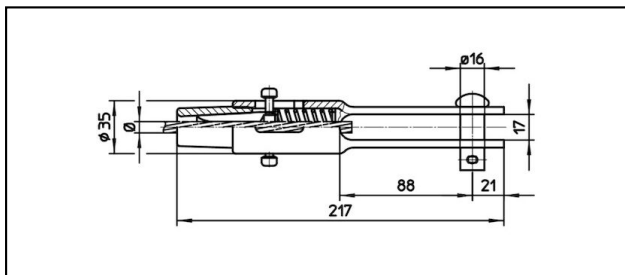
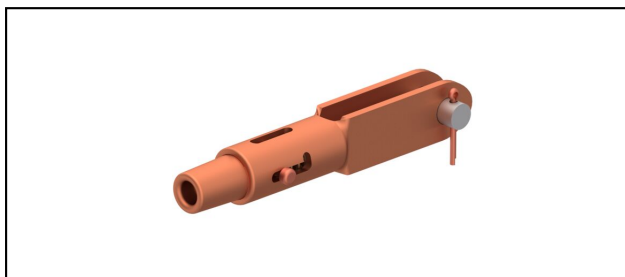


Morse di amarro

■ GCL217/17 Spc.

**Applicazione**

Conduttori in Cu, Cu-acciaio o Bz sottoposti a tiro meccanico

Caratteristiche

Carico di esercizio min. 3 kN / max. 25 kN

Carico di rottura del corpo min. 80 kN

Materiale

Corpo CuNiSi / Cono AlBz o CuNiSi

Legenda

1) Con copiglia in Cu

Rif. Articolo									
615.117.102	F5	8.9	50					0.86	1
615.120.103	F7	9.8	70					0.86	1
615.122.150	F8	10.8	80					0.86	1
615.118.151	F10	12	100					0.85	1

Specifiche tecnici: **GCL217/17 Spc.**

	615.117.102	615.120.103	615.122.150	615.118.151
ferroviaria prodotto nome	F5	F7	F8	F10
Diametro funi portanti	8.9 mm	9.8 mm	10.8 mm	12 mm
Sezione funi portanti	50 mm²	70 mm²	80 mm²	100 mm²
Specifiche commerciali				
Numero di tariffa doganale	85359000			
paese di origine	CH			
Specificazione logistica				
Chilo / pezzo	0.86 kg			0.85 kg

