


Cable dropper clamps

■ SKTF4 Dropper clamp for contact wire and catenary cable

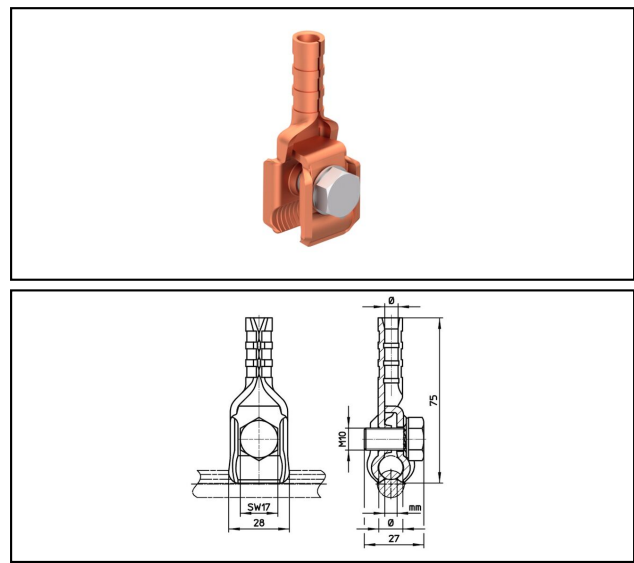

**Application**  
For droppers, current feeding

**Characteristics**  
KZ = Key number of hexagonal pressing tool  
Torque 20-25 Nm

**Material**  
Corpus CuNiSi

- Legend**
- 1) With sleeve of distance
  - 2) KZ 11
  - 3) KZ 13
  - 4) Torque 20 - 40 Nm
  - 5) KZ 12

| Article-Nr. |  |  |  |  |  |  |  |  |  |
|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|--|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 625.509.000 | 10.5 - 12.6                                                                       | 65 - 95                                                                           | 6 - 7                                                                             | 6                                                                                 | 16                                                                                |  |  | 0.115                                                                               | 1, 4, 5                                                                             |

Technical Specifications: Dropper clamp for contact wire and catenary cable SKTF4

|                          |                |
|--------------------------|----------------|
| Article No.              | 625.509.000    |
| Catenary wire diameter   | 10.5 - 12.6 mm |
| Catenary wire section    | 65 - 95 mm²    |
| Contact wire groove      | 6 - 7 mm       |
| Dropper wire diameter    | 6 mm           |
| Dropper wire section     | 16 mm²         |
|                          | 20 - 25 N·m    |
|                          |                |
| comment                  | 1, 4, 5        |
| Commercial specification |                |
| Customs number           | 85359000       |
| country of origin        | CH             |
| Texte                    |                |
| comment                  | 1, 4, 5        |
| Logistic specification   |                |
| Kilo / piece             | 0.115 kg       |

